BEST AVAILABLE COPY

(19)

(11) Publication number: **2001218**

Generated Document.

PATENT ABSTRACTS OF JAPAN

(21) Application number: 2000022919

(51) Intl. Cl.: **H04N 7/18 G06F 13/00 H04Q 9/00**

(22) Application date: **31.01.00**

(54) REMOTE MONITOR SYSTEM AND CLIENT TERMINAL
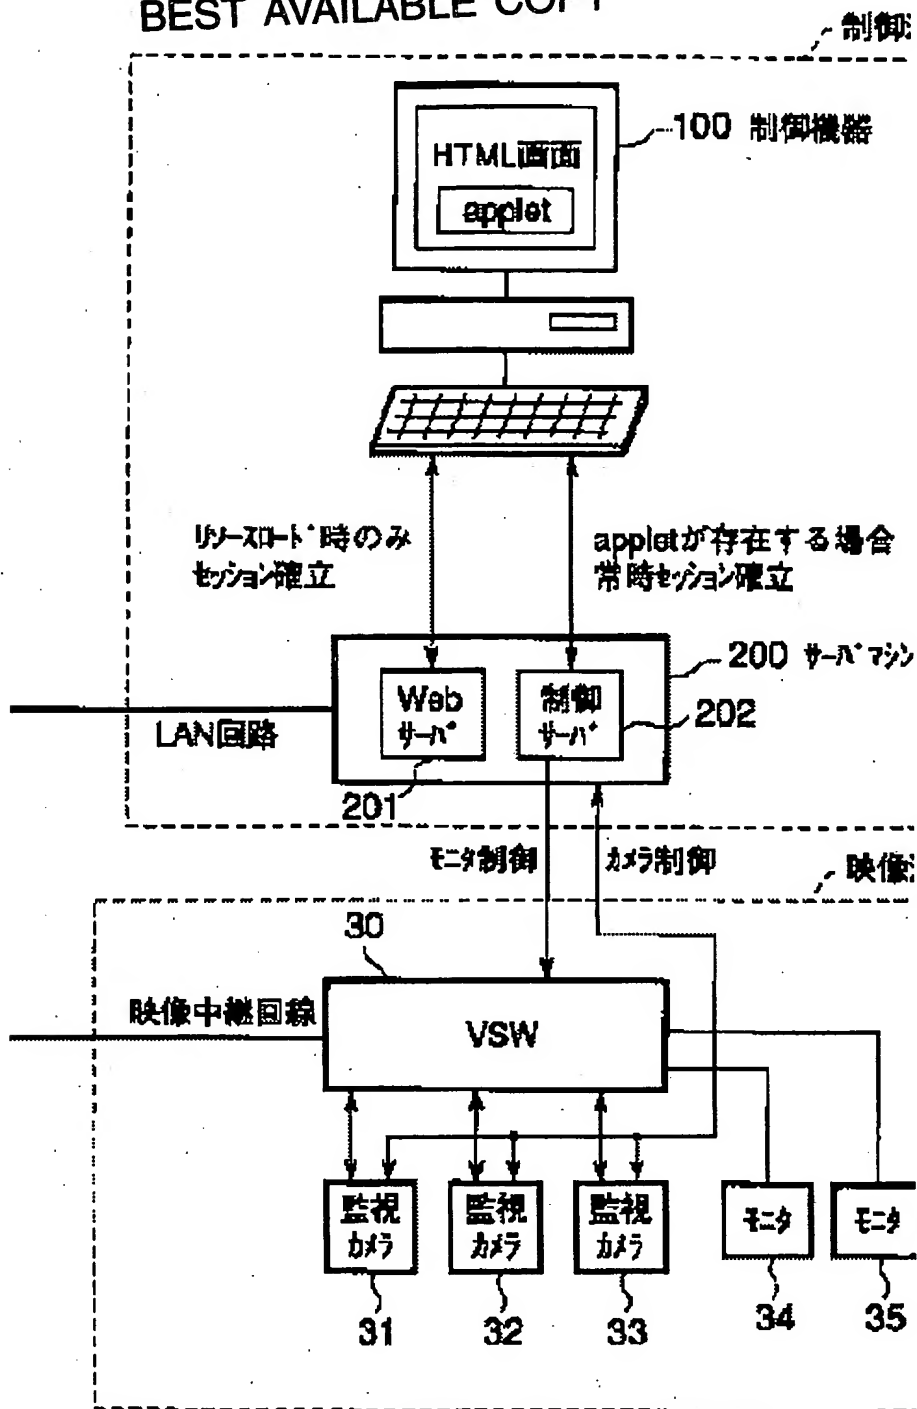
(57) Abstract:

PROBLEM TO BE SOLVED: To provide a remote monitor system and a client terminal, by which communication and linkage are performed with a plurality of different servers from a single Web client picture.

SOLUTION: The single Web client picture of a controller 100 such as a personal computer is divided into a plurality of frames, session is performed with each Web server 201 on a plurality of server machines 200 at every divided frame to obtain resources, each applet included in the resources is individually performed and communication is performed with a control server 202 on the

plurality of different server machines 200.

BEST AVAILABLE COPY

制御

HTML画面

applet

100 制御機器

リソースロート゛時のみ
セッション確立

appletが存在する場合
常時セッション確立

200 サーハ゛マシン

Web
サーハ゛

制御
サーハ゛

202

LAN回路

201

モニタ制御   カメラ制御   映像

映像中継回線

VSW

30

監視
カメラ

監視
カメラ

監視
カメラ

モニタ

モニタ

31   32   33   34   35

The Delphion Integrated View

BEST AVAILABLE COPY

Buy Now: ☑ PDF | More choices...　　　　　Tools: Annotate | Add to Work File: Create new Work File

View: INPADOC | Jump to: Top　　　　　✉ Email this to a

Title: **JP2001218192A2: REMOTE MONITOR SYSTEM AND CLIENT TERMINAL**

Country: JP Japan

Kind: A2 Document Laid open to Public inspection

Inventor: MURATA YUKARI;
YAMAGUCHI SHUICHI;
SATO NAOKO;
KIMIYAMA KENJI;
TAGUCHI MASAYUKI;
YAMAMOTO MASAKI;
KOBAYASHI MINEO;
HATSUPOU MASAHIKO;

Assignee: **TOSHIBA CORP**
TOSHIBA TELECOMMUNICATION SYSTEM ENGINEERING CORP
News, Profiles, Stocks and More about this company

Published / Filed: **2001-08-10** / 2000-01-31

Application Number: JP2000000022919

IPC Code: None

**Priority Number:** 2000-01-31 **JP2000000022919**

Abstract:
PROBLEM TO BE SOLVED: To provide a remote monitor system and a client terminal, by which communication and linkage are performed with a plurality of different servers from a single Web client picture.
SOLUTION: The single Web client picture of a controller 100 such as a personal computer is divided into a plurality of frames, session is performed with each Web server 201 on a plurality of server machines 200 at every divided frame to obtain resources, each applet included in the resources is individually performed and communication is performed with a control server 202 on the plurality of different server machines 200.
COPYRIGHT: (C)2001,JPO

Family: None

Other Abstract Info: None